



Designed by HAOYU Electronics

www.PowerMCU.com


www.HotMCU.com

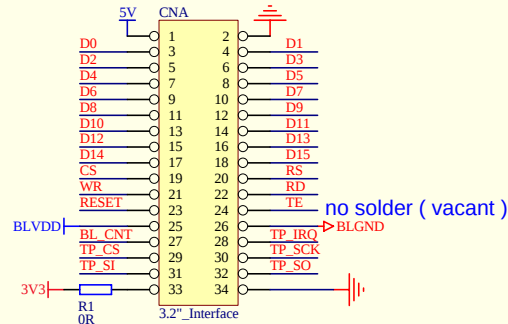



ADS7843 = XPT2046
Touch chip (ADS7843 or XPT2046)

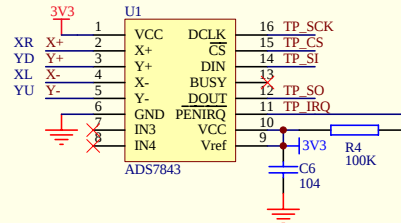



Solder ILI9320

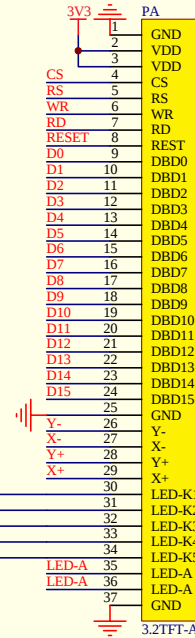

No Solder

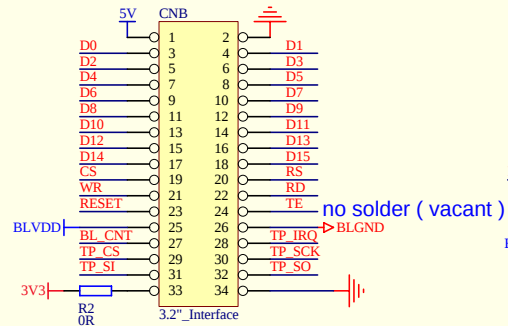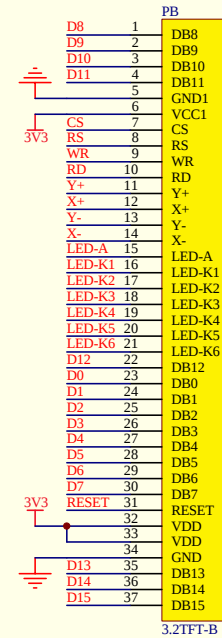


PWM Backlight Control

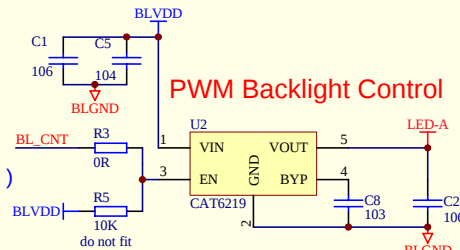

Module description

- when 5V power supply, CNA or CNB 1, 2 pin input 5V power, CNA and CNB 33, 34 pin output 3.3V.
- when 3.3V power supply, CNA or CNB 33, 34 pin input 3.3V power, CNA or CNB 1, 2 pin vacant.
- BLVDD BLGND is backlight input power, must input 5V and GND.
- BL_CNT Backlight control pin, PWM wave control adjustable brightness.

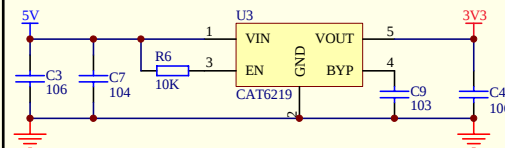

HAOYU
ELECTRONICS

Title		
Size	Number	Revision
A4		
Date:	12-Sep-2010	Sheet of